



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company

Eastto Aluminium Rolling Oils

GRADES : 80 AND 110


INTRODUCTION: EASTTO ALUMINIUM ROLLING OILS 80, 110 are premium quality, low viscosity straight mineral oil specially developed for cold rolling operation of aluminium sheets, strip and foils. Their narrow boiling ranges and high IBP reduce the rate of evaporation which brings down the consumption of oil (Roll Coolant) considerably. The inherent oiliness property reduces the friction to a greater extent and helps the metal reduction without any slippage. It is non-staining, non-corrosive and has good additive solubility for fats and alcohols which are added by the manufacturers of aluminium for the advantage of smooth productions.

APPLICATION: EASTTO ALUMINIUM ROLLING OILS 80, 110 are recommended for cold rolling of Aluminium sheets, Strip and Foils.

TYPICAL PROPERTIES

CHARACTERISTICS	EASTTO ALUMINIUM ROLLING OILS	
	80	110
GRADE	80	110
Kinematic Viscosity at 40°C, cSt	1.6	2
Flash Point, COC,°C, Min.	105	110
TAN, mg KOH / gm	0.002	0.002
Distillation Range,	a) IBP	210
	b) FBP	250

PACKING: 210 Litres Drums

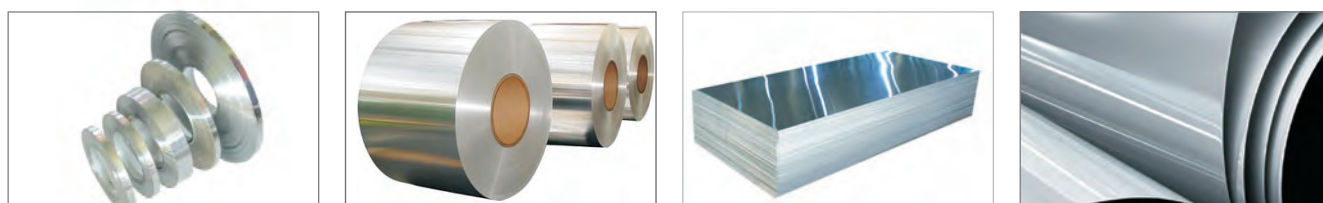

Eastern Petroleum Private Limited

Regd. Off.:
Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990
Email: office@easternpetroleum.in, office@eastto.in,
Web: www.easternpetroleum.in, www.eastto.in



Eastto Aluminium Rolling Oils 80,110