


## PRODUCT DATA SHEET

**PRODUCT:** EASTTO MARINE HYD OIL

**GRADE:** ISO VG 15, 32, 46, 68 & 100.

**INTRODUCTION:** EASTO MARINE HYD oils are blended from Naphthenic Base Stocks containing Antioxidant, Anti-wear, Anticorrosion and antifoam additives.

**APPLICATION:** Recommended for use in Marine Hydraulic systems of steering Gears, Hatch Covers, Turbo Blowers Compressor Lubrication, etc.

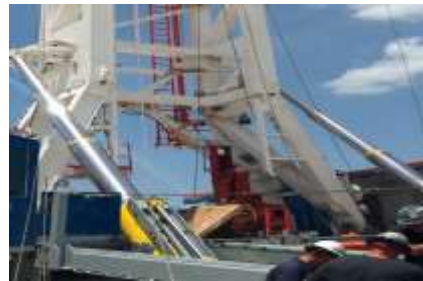

### TYPICAL PROPERTIES

Characteristics	EASTO MARINE HYD OIL				
	15	32	46	68	100
Kinematic viscosity @ 40°C	15	32	46	68	100
Viscosity Index	95	95	95	95	95
Flash Point (COC), °C	160	190	210	210	220
Pour Point, °C	-12	-15	-15	-15	-15

**PACKING:** 210 Litres Drums.

**Date of issue :** 10.11.2014

**Date of Revision:** 06.03.2017

**PDS No.** 13.20.01 – 13.20.05

These Characteristics are typical of current production while future production will confirm to **EASTERN PETROLEUM PVT. LTD.** Specification variation in these characteristics may occur.

